G. R. S. 59] GPB—15,000—20-12-13

GENERAL AND REVENUE SECRETARIAT.

1898-99
191 .
( Inward )

# File No. 115

# Serial Nos.

# Papers Filed.

*Month*_____

SUBJECT.

Sanctioning an Estimate for Rs 328/- for repairing the Sri Champakadamaswamy temple at Bamerghatta, Anekal Taluk -

| PREVIOUS REFERENCES. | LATER REFERENCES |
|---|---|
| | |

Gen. 31.]

1899

OFFICE OF THE DEWAN OF MYSORE
RECEIVED
Date
REG. No 473
MUTTAIRANCH

From The

To The Muzrai Secretary
Bangalore

1898-99

Dated 20th February 1899.

Despatched 24th

Received

General No. 792
No. 266

Enclosure No. 2 Est. with report 1 General abstract 3

Has the honor to forward an Estimate amounting to Rs 209 for Repairing the Temple, Yagashalla and Government Chatram at Banneerguttia for favor of Countersignature and return.

Vide Do to Revenue dy 15/3/99 -

D.O.
to
B. Venkatachellam Esq
Ex Engr.
Bangalore Dn

15-3-99

Many thanks for the Estimate which you have so kindly prepared for the repairs to the Temple & the Chattram at Bennerghatta & forwarded under cover of your office Docket No. 792/266 of 10th Ult — Will you please favor me with a sketch of the buildings shewing the parts proposed to be repaired.

MUZRAI

189

From

THE SECRETARY TO THE
GOVERNMENT OF MYSORE.

To

Dated

Despatched

Received

General No.

Muzrai F. No.

Enclosure No.

As regds the Temple,
I may tell you that
the Hon'ble has a Rs.
~~loan~~ for the Staff-funds
to meet the cost of
the extensive repairs.
now going on for
~~I think~~ it will be
therefore Staff'd, I think,
if only the main
building is repaired ~~at~~ at present
so as to make the
roof water-tight &.
~~Capable of admitting~~
to provide for proper
Ventilation, reserving
the repairs to the Yaga Sala.
to be ~~taken up~~ attended to later on
as funds become
available for the purpose.

yours

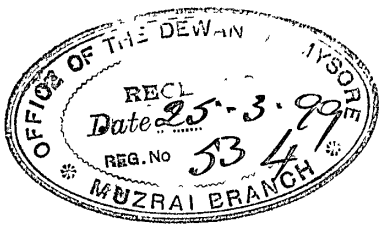


Gen. 31.]

1899

From The Executive Engineer,
Bangalore Division

To The Muzarai Secretary
with the Government of
Mysore

Dated 21st March 1899

Despatched 22nd

Received

General No. 1190
No. 434

Enclosure No.

Has the honour to acknowledge the receipt of his D. O. of the 15th current, requesting to submit an Estimate for actual repairs and ventilation and light required for the main temple at Bannerghatta and to state, that necessary instructions have been issued to draw up plans of temple and chattrams.

Requests the Muzarai
Secretary

Secretary will be so good as to return the Estimate forwarded with this office no: $\frac{792}{266}$ dated 20 ult. so that reference may be had to it, while preparing the fresh Estimate. Undersigned personally enquired at the office of the Municipal Secretary, but this officer being out on Camp, this reference has been made.

Executive Engineer,
Bangalore Division.

Do to The Ex: Engineer
Bangalore Dn

Your docket no 1190/434
dy 21st March 1899.

As desired therein
I ~~send~~ lend herewith the
Estimate ~~for the~~ repairs
of the Bannerighatta
temple. ~~for~~

Yours &c
M

30/3/99

1899

From The Executive Engineer,
Bangalore Division.

RECEIVED
17 11 99
304

To The Secretary
With the Government
of Mysore

Dated Bangalore 16 November 1899

Despatched 17

Received

General No. 5722
No. 1715

Enclosure No. 1 Estimate with report.

17-11-99

Sanction refers to
Temple
Estimate Rs 312
to be received in
abstract
Estimate must
show as for
Estimate
Rs as
28/11/99

In continuation with this office
No. 772/266 dated 17. 2. 1899 forwarding
the estimate for repairs of the
Bamberaghatta Temple and the
Chattram, I have the honor to
forward a modified estimate
for the repairs and to state
that the repairs if executed
as per this estimate will materially
improve the institutions, that
any smaller repairs will not
be of much use.

Executive Engineer,
Bangalore Division

To,

The Executive
Bangalore division

D. O.

Your docket No. 5722/1715
dated 16th ultimo, for-
warding two estimates,
amounting to Rs 2026
for repairing the
said Chattram at Ban
nerghatta.

As regards the re-
mains of the temple, there
are now no funds to
meet the entire cost.
namely Rs 995. From
the General Abstract
forwarded by you, I
observe that the cost
of the repairs of the main
temple amounts to Rs 312.

It is just this amount
that could well be shared
this Year. Can you therefore
kindly send me ~~an estimate~~
estimate for ~~only these~~
repairs work only. which will
be ~~separately~~ sanctioned & let by
for the rescue. The ~~quotations~~.
to your office also.
forwarded herewith for
reference.

Yours

# Estimate of the probable cost for Repairing the Temple at Bummuruttia, Anuhal Valley

| Details of work | No | Dimensions | | | Contents | | |
|---|---|---|---|---|---|---|---|
| Dismantling old concrete | 1 | 13 | 8½ | ½ | 55 | Cft. | 55 |
| ——— New concrete | 1 | 13 | 8½ | ½ | 55 | Cft. | 55 |
| 2nd hall teakwood door battens 3" thick fixing to complete | 1 | 6' | 4½ | " | 29 | Ft. | 29 |
| Repairs to cracks. | | | | | | | |
| Dismantling old concrete and replacing the same with new concrete to cracks. | | | | | | | |
| ——— 1st Hall | 2 | 32 | 1 | 1 | 64 | | |
| do | 2 | 17 | 1 | 1 | 34 | | |
| 2nd Hall | 1 | 12 | 1 | 1 | 12 | | |
| do | 2 | 5 | 1 | 1 | 10 | | |
| do | 1 | 9 | 1 | 1 | 9 | | |
| do | 1 | 10 | 1 | 1 | 10 | | |
| do | 1 | 24 | 1 | 1 | 24 | | |
| do | 1 | 10 | 1 | 1 | 10 | | |
| do | 1 | 18 | 1 | 1 | 18 | | |
| do | 1 | 45 | 1 | 1 | 45 | | |
| do | 2 | 15 | 1 | 1 | 30 | | |
| do | 1 | 20 | 1 | 1 | 20 | | |
| Temple do | 2 | 30 | 1 | 1 | 60 | | |
| Total | | | | | 356 | | |

Repairs to windows of the

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Centre wall | 4 | . | . | . | 4 | Sqr | 4 |
| In the Flats | | | | | | | |
| do Flats No 7 | 7×4 | 2½ | 1 | .61" | 70 | | |
| 9 sides do | 7×2 | 8½ | 1 | (41" | 119 | | |
| Back do | 7×. | 5 | 1 | .41" | 70 | | |
| | | | | | 259 | | |
| In Flats No 3 | 3×2 | 2½ | 1 | .61" | 30. | | |
| sides do | 3×2 | 7¼ | 1 | (41' | 47 | | |
| Front do No 3 | 3×2 | 5½ | 1 | .41" | 33 | | |
| Do | | | | | | Sft | 369 |
| In | | | | | | | |
| do | | | | | | | |
| 1 | 7 | 24 | 1½ | ½ | 126 | | |
| No 3 | 3 | 4. | 1' | 1 | 54 | | |
| | | | | | 180 | Sft | 180 |
| do do | | 4. | 1½ | | 252 | | |
| do do | 3 | 4.1' | | | 105 | | |
| | | | | | 360 | S | 3·60 |
| do do | | | | | | | |
| | 1 | 3 | | | 4.0 | Sft | 16 |
| do do | | | | | | | |
| | 1 | 35 | 3 | 1 | 105 | do | 105 |
| do do | | | | | | | |
| | 1 | 50 | 3½ | | 131 | S | 1·31 |

Lump Sum Rs 25/-

Bhandasaamy Reddy
Executive Engineer.

Abstract of Estimate for

Muz.]

| Particulars | Per | Rate | Quantity | Cost |
|---|---|---|---|---|
| Limewashing old & new walls | " | . . | 5 | 1 . |
| Ditto ditto ceiling | " | . . | 5 1 | 111 . |
| Labour & door (batten) complete | 5 | 1 12 . | 7 | 51 . . |
| Repairs to new window | R | 3 . . | 4 | 12 . . |
| Stone slab pointed in Cinnam plaster, | | 2 . . | 4 11 | 15 . |
| Extra work | do | . | 1 | . . |
| Ditto in ceiling | | . 3 . | 105 | . . |
| Laying 4 inch iron [illegible] | | . 3 . . | 1 | . 3 . . |
| | | | | 31 . . |

30th November 1899
Bangalore

B. Kundaswamy Naidu
Mugpal Overseer

Sanctioned for Rs.

in Govt. Pros

No. dated

Bangalore Division

Bangalore
27th December 98

My dear Sir

I do desire in your
Dio of the 8th inst, I have
to grant the Estimate for
repairs of the temple. It amounts
to Rs 3200/- including a contingency
of 3% which I hope it will defray
towards, a sum not exceeding Rs 34/-
will have the assent (10 per cent
for establishment and 1/2 per cent
for Roads & plant) I have also
sent the original Estimate to which
I will may permit the repairs for
repairs. Yours sincerely

Sub Division = Bangalore Division

Estimate of the probable cost of repairing the Temple at Agatta Anekal Taluk:-

| Details of work | No: | Dimension | | | Quantity | | Total |
|---|---|---|---|---|---|---|---|
| Dismantling old concrete | 1 | 13 | 8½ | ½ | 55 | cft | 55 |
| New Concrete | 1 | 13 | 8½ | ½ | 55 | | |
| to cracks | | | | | | | |
| Dismantling old concrete & replacing same with new concrete to cracks | | | | | | | |
| 1st Hall | 2 | 32 | 1 | 1 | 64 | | |
| Do | 2 | 17 | 1 | 1 | 34 | | |
| 2nd Hall | 1 | 12 | 1 | 1 | 12 | | |
| Do | 2 | 5 | 1 | 1 | 10 | | |
| Do | 1 | 9 | 1 | 1 | 9 | | |
| Do | 1 | 20 | 1 | 1 | 20 | | |
| Do | 1 | 24 | 1 | 1 | 24 | | |
| Do | 1 | 10 | 1 | 1 | 10 | | |
| Do | 1 | 18 | 1 | 1 | 18 | | |
| Do | 1 | 45 | 1 | 1 | 45 | | |
| Do | 2 | 15 | 1 | 1 | 30 | | |
| Do | 1 | 20 | 1 | 1 | 20 | | |
| Temple Do | 2 | 30 | 1 | 1 | 60 | | |
| Chunam Concrete over roof of the Sky lights | | | | | | | |
| Posts No: 7 | 1 | 24 | 1½ | ½ | 126 | | |
| do Sides No: 3 | 1 | 24 | 1½ | ½ | 54 | | |
| Total | | | | | 591 | cft | 591 |
| 2nd Hall Teakwood door battened 3" thick fixing &c complete | 1 | 6½ | 4½ | - | 29 | Sft | 29 |
| Repairs to new windows of the sky - in Hall | 4 | - | - | - | 4 | No: | 4 |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| **Small sky lights** | | | | | | | | |
| **Stone slabs** | Posts no: 7 | 7 | 4 | 2½ | 1 | (6") | 70 | |
| | For sides .. Do | 7 | 2 | 8½ | 1 | (4") | 119 | |
| | Do front & rear Do | 7 | 2 | 5 | 1 | (4") | 70 | |
| | Total | | | | | | 259 | |
| | Do sky lights stone posts no: 3 | 3 | 4 | 2½ | 1 | (6") | 30 | |
| | Do sides ——— no: 3 | 3 | 2 | 7¾ | 1 | (4") | 47 | |
| | Do front & rear ——— no: 3 | 3 | 2 | 5½ | 1 | (4") | 33 | |
| | Total | | | | | | 369 | Sft 36 |
| **Chunam Plastering** | | | | | | | | |
| | over roof of the sky lights no: 7 | 7 | | 24 | 1½ | " | 252 | |
| | ——— Do ——— no: 3 | 1 | | 24 | 1½ | " | 108 | |
| | Total | | | | | | 360 | Sqr 3.6 |
| **Earthwork excavating foundation for footing to rear wall of Thayar temple** | | 1 | | 35 | 6 | 2 | 420 | cyds 16 |
| **Brick in chunam filling foundation** | | 1 | | 35 | 3 | 1 | 105 | cft 105 |
| **Chunam plastering for above footing** | | 1 | | 35 | 3¾ | " | 131 | Sqr 1·31 |
| **Clearing and levelling the ground all round the building** | | Lump | | Sum | | | | Rs 25 |

## Abstract

| Items of work | Per | Rate | Quantity | Cost |
|---|---|---|---|---|
| Dismantling old concrete | Cft | @ 2 @ | 55 | 7 |
| Chunam Concrete | Cft | @ 3 @ | 591 | 111 |
| Teakwood door (battened) complete | Sft | 1 12 @ | 29 | 51 |
| Repairs to new windows | No: | 3 @ @ | 4 | 12 |
| Stone slabs simple dressing | Sft | @ 3 @ | 369 | 69 |
| Chunam plastering | Sqrs | 3 @ @ | 4·91 | 15 |
| Earthwork | Cyds | @ 2 @ | 16 | 2 |
| Brick in chunam | Cft | @ 3 @ | 105 | 20 |
| and levelling the ground all round | Item | 25 @ @ | 1 | 25 |
| Total Rupees | | | | 312 |
| Add contingencies at 5 per cent | | | | 16 |
| Grand Total Rupees | | | | 328 |

Assistant Engineer

7-12-1899

Work as per Estimate

8/12/99

## Abstract.

| Items. | Per | Rate | Temple. | | agasa a book | | Pagasala. | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | . | G. | . | G. | | G | | G. |
| Dismantling old concrete. | u | 2 u | 55 | 7 | u | u | u | u | 55 | 7 |
| Chunam concrete. | u | 3 u | 591 | 111 | u | u | u | u | 591 | 111 |
| Teak wood door. (battened) complete | | 1 12 u | 29 | 51 | 26 | 45 | 26 | 46 | 81 | 142 |
| Repairs & New windows. | Rs | 3 u | 4 | 12 | u | u | u | u | 4 | 12 |
| Stone slabs simple dressing. | Sf | u 3 u | 369 | 69 | u | u | u | u | 369 | 69 |
| Chunam plastering. | | 3 u u | 4.91 | 15 | 4.34 | 13 | u | u | 9.25 | 28 |
| Earth work. | | a 2 u | 16 | 2 | u | u | u | u | 16 | 2 |
| Brick in Chunam. | cf | u 3 u | 105 | 20 | u | u | u | u | 105 | 20 |
| Clearing and levelling the ground all Round | t | 25 u u | 1 | 25 | 1 | 30 | 1 | 15 | 3 | 70 |
| Dismantling and Rebuilding old Roof. (Stone slabs) | S | u 8 u | u | u | 216 | 108 | u | u | 216 | 108 |
| -do- old concrete & replacing with new Chunam concrete | cft | u 3 6 | u | u | 326 | 71 | 90 | 20 | 416 | 91 |
| -do- old wall. (masonry) | cft | u 6 | u | u | 1158 | 35 | 360 | 11 | 1518 | 46 |
| Stone in Chunam. | cf | u 3 u | u | u | 937 | 176 | 288 | 54 | 1225 | 230 |
| Chunam pointing. | Sq | 1 8 u | u | u | 5 | 8 | 2.4 | 4 | 7.84 | 12 |
| Total. | | | | 312 | | 486 | | 150 | | 948 |
| Contingencies @ 5% — Rupees. Grand Total | | | | | | | | | | 995 |

Assistant Engineer
No 2 Bnl Div

# General abestract.

| Items. | Cost. |
|---|---|
| during the Government Chuttrum at | 982 |
| do. Temple at Bammerquetta. | 312 |
| Sala Cook Room. | 486 |
| Yagga sala - do. do. | 150 |
| Total Rupees. | 1930 |
| Contingencies @ 5%. | 96 |
| Grand total Rupees. | 2026 |

Executive Engineer,
Bangalore Division,
Bangalore.

Assistant Engineer
No. 2. Sub. Div.

Divisional Accountant 30.10.99

1900
~~189~~

From The

To The Munsarim Secretary,
with the Government
of Mysore

Dated 27th
Despatched } January 1900
Received

General No. 537
No. 175

Enclosure No.

With office no 5122/1715 dated 16th November 1899 forwarding for Countersignature and return an Estimate amounting to Rs 2,026/- for repairing the Temple and Chattrams at Bangarpet

I have the honor to request the favor of an early return of the above duly countersigned.

"By order"

for Executive Engineer.

OFFICE OF THE ... DIVISION
Dated 29. 1. 1900
No. 525
MUZRAI BRANCH

Refer as per letter dated 11/1/1900

Despatched to the Executive Engineer in the Kolar District

Peon

1897-1902

Order

No 634 Emt
Mmz 7-89-92
D/18/12/99

An estimate for Rs 328 for repairing the Sri Chamakadamaswami temple at Bannerghatta, Talluk, prepared under the orders of the Mmz Dy. is sanctioned, the charge being met from the State grant of Rs 15000 sanctioned for the repairs of Mmz Buildings in Govt Pro No. 1063 D/ 29th March 1899 Mmz 7 105-92

2 The amount sanctioned in the para-going para will be paid on presentation to the Comptr of a bill duly signed by the Mmz Dy.

To,
The Comptr of Govt
with copy of
abstract estimate.

Mmz Secy

# Report

Under the orders of the Muzrai Secretary I visited the Bannergatta temple this morning and inspected the repairs to be effected therein and found the following items of repairs as per the Estimate sanctioned dated 8-12-9 are not so very necessary viz/

1 Dismantling old concrete amounting to Rs 7
2 Replacing it with fresh concrete - Rs 111
3 Stone slabs, simple dressing Rs 69

These may be considered & left over & carry out to renewal work Rs about 28/12/99

There are some small cracks on the roof of the temple, the leakage through which can be completely stopped by using linseed oil with resin. Some chunam pointing is required for the broken stone-slabs of the floor, instead of replacing them with new ones.

Awaiting for early orders.

26th December/99

B Kundusaumyhaidu
Muzrai Overseer

ಮುಚರಂಲುಸಕ್ರಿ ಆರಿಲಿ ಪ್ರೈನ್ಸ್- 28-12 1877.

ಎಚ್ಚೈರುಗಡ್ಡ ದಕ್ಷಿಣ ಕಂಟ್ರಾಕ್ಟರ್ ಕೊಂಳ್ಳಶಾಂ
ಶಿಂಗರಿಗೆ—

ಲಲಾಣ ಸಿಂಮ್ಮಲ್ಲಿಸಿಂಳ್ಳಿರುವ ನಿರ್ಣಕ್ಕೆ ಕೆಲಸ
ಯಬ್ಬಿಮೋಟ್ ಕಿಳಿಸಿ ಬಿಟ್ಟು ಕ್ಕೊಂಡಿಸಲುಂದಿಲುವ ಲ್ಲಿ
ಟಂಗಳ ಶೈತಿ- ತಿಲ್ಲಿಬಂಧಲ್ಲು ಅಂದರೆ: —.

1) ಬೇರವಸಿಕ್ಕಿನದಮೂಲಲ್ಲಾಂಗದಲ್ಲಿ ಕಾಂಕ್ರೀಟ್
ಡಾಕುವದಕ್ಕೆಸಿ ಅಂದಾಂಚಾಂಪೀಳಲಗು-
III—೦—೦.

2. ಕೆಲದಲ್ಲಿ ಡಾಲಿದಂತಿ-ಲುರುವ ಚಪ್ಪಡಿಗಳ
ಶೈತಿ ಕೆಲಸುಳಿಂದ ದುಕ್ಕಾಂಲಾಗುವದಕ್ಕೆ ಇದ
ಲಾಣ ಕ್ಕೊಂಳ್ಳದಂತಿ ವ-ಲ್ಲುಚಪ್ಪಡಿ ಡಾಕ್ಕೀವದ
ಕ್ಕೆಸಿ ಅಂದಾಜಾಂ—. — 69—೦—೦.

3. ಕಂಳಿಕಾಂಕ್ರೀಟ್ ವರಕೆಗದು ಡಾಕ್ಕೀ ವದಕ್ಕೆಸಿ-
7—೦—೦.

ಇಮೊಂಮ್ಮಲ್ಲಿ 187—೦—೦.

ಕುರಪಾಂಲಂಲ ಲುಡಿವಲು ಂರಲುಕಿಸಿವುಗಾಂರಿಗಳ
ಳ್ಳ ಸಲಿಸುತುರಮು ಮಂತ್ರಿಗಾಲಿಂಧದಲ್ಲಿವಶ್ಚಕವಿಲ್ಲಿ
ಚಾಂತಿ ತಿಲ್ಲಿಗಳ್ಳನ್ನಳಿಬಿಲ್ಲಿಗಳಿಕೆ ಲಲಿಂಗಿಸಿ ಮಂಡಿ
ಸುವಂಶೆ ಸಿಮಿಳಿ ತಿಳ್ಳಿನಿಬಿಲ್ಲಿಕೊಂಬಲು ಸಲು ನಿಂಡಿ

Read:—

Govt Pro No. 634
Inuz 789-92

dated 18th December 1899 sanctioning an estimate amounting to Rs 328 for repairing the Sri Champa Kadamaswami Temple at Bauneraghatta, Anekal Taluk, the charge being met from the State Grant of Rs 15000 provided in the Inuxual Budget for the year 1899-1900.

---

No 777
Inuz 789-92
En: 2
Dt 15th January 1901.

Order thereon:—

---

A bill for Rs 187-4-3 being the actual cost incurred on account of the aforesaid repairs is countersigned and forwarded to the Comptr for audit and return to this office, the amount

being made payable in
the State Huzur Treasury
at Bangalore A copy
of the measurement list
on which the bill is
based is also forwarded
to the Comptr for reference.

2. The amount of the
present bill, namely
Rs 187-4-3 will be
met from the State
Grant of Rs 15000 provided
in the Huzrai Budget
for the current offl year
as the funds allotted
in the Govt Nos of 18th
Decr 1899 read above
have lapsed on account
of them not having been
drawn within the close
of the official year
during which they were sanctioned

Muz Secy

To,
The Comptr to Govt
with the bill &
a copy of the
measurement
list

Mss. Acj

The Government of Mysore ..... Dr.

| Particulars. | Amount. | Remarks. |
|---|---|---|
| On account of Repairs executed to the Sri Champakadhamaswamy temple at Bannerighatta, Anekal Taluk | 187 4 3 | vide Govt. Ro No Dated |

Rupees one hundred and eighty seven, annas four and pies

[To be made payable at the State Huzur Treasury]

Bangalore,
Dated ... January 1901.

Dft.

Asst
Mysore Secretary

As per orders of the Inspector Secretary I proceeded to Bannerghatta Temple Anekal Taluq to take the measurement of work done to the Temple there.

The original Estimate sanctioned Rs 328/-

The measurement bill now submitted amounts Rs 187-4-3.

The work has been satisfactorily done and the money can be paid to the Contractor.

Bangalore
14th January 1901

B Kunduswamy Naidu
Inspector Overseer

Measurement bill of actual work executed to the Temple at Bannerghatta Anekal Taluq Bangalore District.

| Details of works | No | Dimensions L. B. D. | | | Quantity | Total |
|---|---|---|---|---|---|---|
| Dismantling old Concrete | 1 | 9½ | 1½ | 1 | 14¼ | |
| Do Do Do | 1 | 17 | 1 | ½ | 8½ | |
| Do Do Do | 1 | 7 | 1 | ½ | 3½ | 26¼ |
| Dismantling old Concrete and replacing the same with new Concrete | 1 | 9½ | 1½ | 1 | 14¼ | |
| Do Do Do Do Do | 1 | 17 | 1 | ½ | 8½ | |
| Do Do Do Do Do | 1 | 7 | 1 | ½ | 3½ | 27½ |
| Burnt brick in Chunam supporting wall on the roof of the Temple | 1 | 9½ | 1 | ½ | 4¾ | |
| Burnt brick in Chunam for footing the rear wall | 1 | 3 | 2 | 4½ | 315 | |
| Burnt brick putty with chunam at foot of the parapet wall North | 1 | 99 | 3" | 5" | 10 5/16 | |
| Do Do Do Do Western Side | 1 | 59 | 3" | 5" | 6 7/48 | |
| Do Do Do Do Southern Side | 1 | 80 | 3" | 5" | 8 | 394¾ |
| Chunam Plastering supporting wall on the roof | 1 | 9½ | 1 | 2 | 4¾ | |
| Do Do for footing the rear wall | 1 | 35 | 2 | 2½ | 17 | |
| Do Do for footing the Parapet wall Putty North Side | 1 | 99 | 5" | | 41¼ | |
| Do Do on Western side | 1 | 59 | 5" | | 24 7/12 | |
| Do Do Do Southern Side | 1 | 80 | 5" | | 33⅓ | 279⅚ |

| | | | | | | |
|---|---|---|---|---|---|---|
| Earth work excavating foundation for footing to rear wall | 1 | 35 | 2 | 1/2 | 105 | 105 |
| Clearing and leveling the ground | Lump sum | | | | Rs— | 25/— |
| Second Hall Teak wood door battened 3" thick fixing &c complete | 1 | 7/2 | 4/2 | | 33 3/4 | 33 3/4 |
| Repairs to new sundrons of the skey lights in centre Hall | 4 | Rupees 3/— each | | | | Rs 12 |

Bangalore
11th January 1901

B. Kandasammy Naidu
Inspecting Overseer

Abstract of Estimate for *Repairing the Temple at Bennergatta*

Muz ] *Anekal Taluq. Bangalore District.*

| Particulars | Per | Rate | Quantity | Cost |
|---|---|---|---|---|
| Dismantling old Concrete | C ft. | " 2 " | 26 1/4 | 3 4 6 |
| Chunam Concrete | Do | " 3 " | 27 1/2 | 5 2 6 |
| Brick in Chunam | Do | " 3 " | 349 3/4 | 74 0 3 |
| Chunam Plastering | Sqrs | 3 " | 279 3/4 | 8 4 0 |
| Earth work | C. yds | " 2 " | 105 | 0 8 0 |
| Clearing and leavelling the ground | Lump Sum | | Rs | 25 0 0 |
| Teak wood door (battened) complete | S. ft | 1 12 " | 33 3/4 | 59 1 0 |
| Repairs. to new window | No | 3 " " | 4 | 12 0 0 |
| | | Total Rupees— | | 187 4 3 |

Bangalore
11th January 1901

B. Kuad as dummy handed
Imperial Overseer

Sanctioned for Rs.

No. dated

in Govt. Press